



A-KP2 Amplified Keypad



110 punchdown connectors on Amplified Keypad

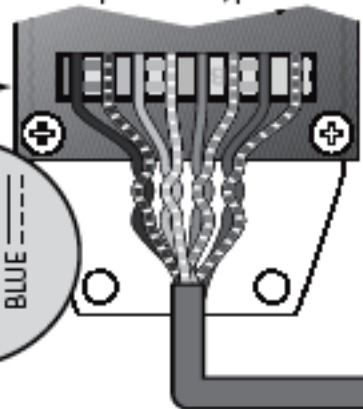

Wire order


RJ45 Wall Plate (optional) located near Hub

1

RJ45 CAT-5 patch cable

CAT-5 (behind wall)

When wiring directly to Amplified Keypad, use T568A RJ45 wire configuration

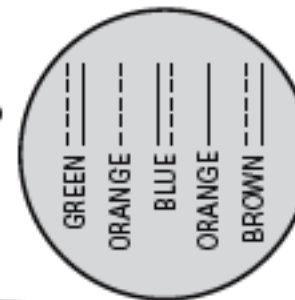

To use Status feature: Move to STATUS position and enable status on ALL Amplified Keypads



846C

3



Audio Receiver

Source Component

Alternate method: Connect 1 source directly



Standard method: Connect multiple sources via Tape 2 or Zone 2 output of Receiver

8



2



Emitter attaches to each source component's IR window

3



to switched AC outlet

3



6



A-PS


4



RJ45 CAT-5 patch cable

- to Link Out on another A-BUS single-source Hub (shown)
- or, to A-BUS-Ready output

7

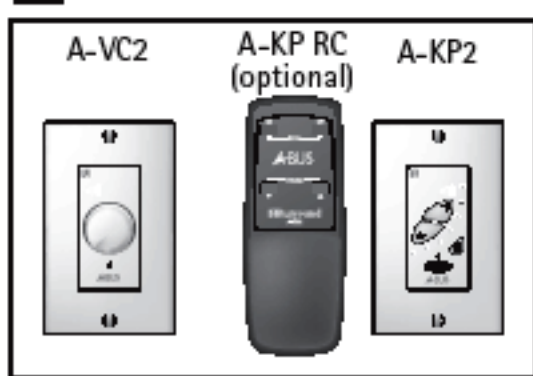

A-VC2

A-KP RC (optional)

A-KP2