

VISUAL PERFORMANCE® SERIES

VP80R + Square Adapter



The VP80R introduces Sonance's award-winning Visual Performance Series aesthetic and best-in-class sonic performance at a new, entry-level price point.

Developed using the same state-of-the-art cutting-edge computer modeling software implemented throughout the next generation of Visual Performance Series, the VP80R features a chambered low-diffraction cloth dome tweeter and high excursion polypropylene woofer to deliver clear and

natural treble and clean effortless bass response across all listening levels. The VP80R is the perfect in-ceiling speaker for the client seeking a cost-effective solution that delivers a discreet low profile aesthetic combined with highly impressive sonic performance.



VP80R



Square Adapter w/ Grille

Key Features

Aesthetics

- Award-winning low profile microtrim grille
- Paintable to match ceiling color
- VP8SQ gives the speaker a square aesthetic (sold separately)
- Complement contemporary ceiling moldings & interior design

Performance

- Developed using cutting edge design and computer modeling software
- Consistent tonality and reduced distortion across all listening levels
- Chambered low diffraction cloth soft dome tweeter

- Clear and natural treble, lower resonance frequency
- High excursion, forward placed polypropylene woofer
- Smooth and effortless bass, reduces early reflections for cleaner sound

Installation




- One-piece grille with removable scrim cloth
- Simplified one-step painting process for a better finish
- Best-in-class fit and finish
- Magnetic retention system eliminates gaps between grille and ceiling, minimizing shadows
- Two-piece toggle feet

Specifications

Diameter: 11 5/8" (295mm)
Depth: 3 3/4" (95mm)
Cut Out Diameter: 10 1/8" (257mm)

With Square Adapter and Grille

Width: 11 3/4" (299mm)
Height: 11 3/4" (299mm)

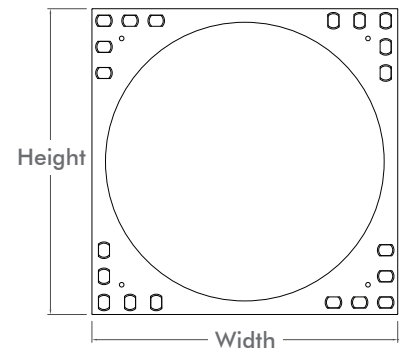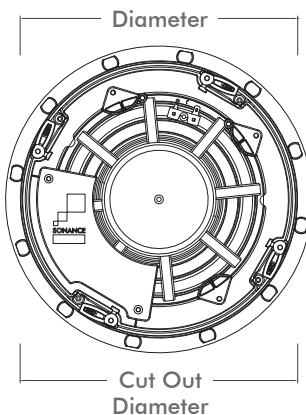



VP80R +VP8SQ

SPECIFICATIONS

SKU	93089
UOM	Pair
Tweeter	1" (25mm) cloth dome, Ferrofluid-cooled
Woofer	8" (203mm) polypropylene cone with a rubber surround
Frequency Response	42Hz – 20kHz ±3dB
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling	5 watts minimum; 125 watts maximum
Sensitivity	90dB SPL (2.83V/1 meter)
Grille	Perforated steel
Dimensions (Dia. x D)	11 5/8" x 3 3/4" (295mm x 95mm)
Dimensions with Square Grille (W x H)	11 3/4" x 11 3/4" (299mm x 299mm)
Cut-Out Dimensions (Dia.)	10 1/8" (257mm)
Shipping Weight	12.5 lbs (5.67kg) pair

Associated Products

VP8SQ Square Adapter w/ grille (Pair Per Box)	93031		Large Round Acoustic Enclosure (Each)	91900		Large Round Coverplate (Pair Per Box)	92245	
VP8SQ Square Adapter w/ grille (5 Pair Bulk Pack)	93034		Large Round Flex Bracket (5 Pair Per Box)	92247				
Large Round Retrofit Enclosure (Pair Per Box)	92243		Fire-Rated Listed Deep Backcan (Each)	92808				

LIMITED LIFETIME WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the life of the Product, except for the grille, which is warranted for five (5) years. Sonance will at its option and expense either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. **Please visit our website and owner's e-Manual for complete warranty and exclusion information.**



©2014 Sonance. All rights reserved.
 Sonance, Visual Performance and Roto-Lock, are registered trademarks of Dana Innovations.
 Due to continuous product improvement, all features and specifications are subject to change without notice.
 For the latest Sonance product specification information visit our website: www.sonance.com
 SONANCE • 212 Avenida Fabricante • San Clemente, CA 92672-7531 USA
 (800) 582-7777 or (949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (800) 582-0772
www.sonance.com